

GEHL®

RS6-34

TELESCOPIC HANDLER



CAPACITIES

Lift Capacity (kg)	6,000 lbs. (2722)
Maximum Lift Height (m)	34'3" (10.4)
Capacity at Maximum Lift Height (kg)	4,000 lbs. (1815)
Maximum Forward Reach (m)	23'3" (7.0)
Capacity at Max. Forward Reach (kg)	900 lbs. (409)
Max. Reach Below Grade (mm)	24" (610)

GENERAL SPECIFICATIONS

Approximate Weight (kg)	15,100 lbs. (6850)
Length – Less Forks (m)	16'0" (4.9)
Width (m)	7'10" (2.4)
Ground Clearance (mm)	14" (350)
Wheelbase (m)	9'2" (2.8)
Turning Radius (m)	12'6" (3.8)
Overall Height (m)	7'10" (2.4)
Frame Leveling	±10°
Fuel Capacity (L)	29 gal. (110)

TIRE OPTIONS

15.00 x 19.5/12 PR
15.00 x 19.5/12 PR Foam-Filled
15.00 x 19.5 Solid Rubber

ENGINE

Manufacturer	John Deere
Power (kW)	74 hp (55)
Aspiration	Turbocharged
Model	4045T Interim Tier IV
Rated Speed	2400 rpm

COMPONENTS

Transmission	Dana 3-speed Powershift
Maximum Travel Speed (km/hr)	20.2 mph (32.5)
Selective Steering	4-Wheel
	2-Wheel
	Crab
Hydraulically Actuated Internal Wet-Disc Brakes	4-Wheel
Parking Brake	Spring-Applied, Hydraulic Release (SAHR) on Front
	Axle
Axle Manufacturer	Dana

HYDRAULIC SYSTEM

Pump Type	Gear
Total Capacity (L/min)	29 gpm (110)
System Pressure (bar)	3000 psi (207)
Hydraulic Reservoir Capacity (L)	35 gal. (133)


RS6-34

TELESCOPIC HANDLER

FEATURES

- 6,000 lbs. (2722 kg) Capacity
- Boom Control Joystick
- Fork Tilt and Frame Level Joystick
- 4,000 lbs. Capacity at Full Lift Height
- SAHR Parking Brake
- Maximum Lift Height - 34 ft. 3 in.
- Reverse Warning Horn
- 3 Speed Forward/Reverse Powershift Transmission
- Brake Lights and Back Up Light
- Planetary Axles With an Open Center Differential
- Engine Temperature, Fuel, and Hourmeter Gauges
- Full Time Four Wheel Drive
- Right Hand Side Mounted Rear View Mirror
- Four Wheel Wet Disc Brakes
- Engine Block Heater
- Power Steering
- Left Hand Front Fender
- Selective Steering (Front Wheel, All Wheel, and Crab)
- 12-Volt Electric System
- Storage Compartment Under Seat
- DYNATTACH® Quick Carriage Release
- Dual Element Air Filter with Restrictor Indicator
- Automatic Self-Leveling Fork System

LOAD CHART

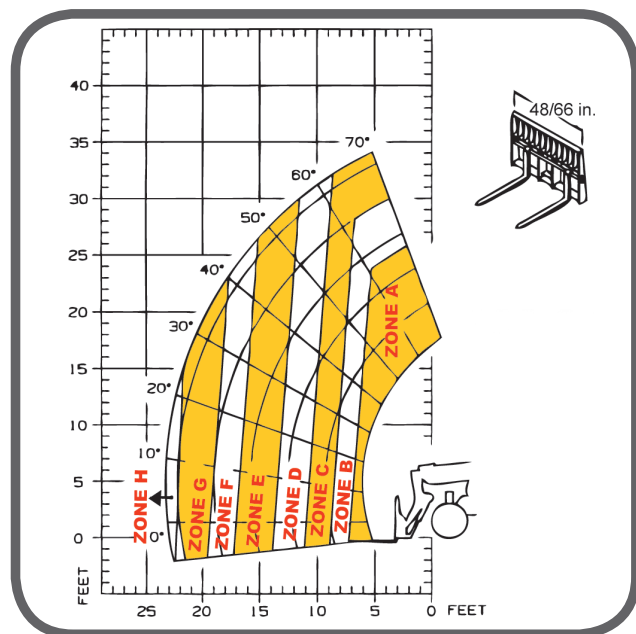

- A** 6,000 lbs. (2722 kg)
- B** 5,000 lbs. (2268 kg)
- C** 4,000 lbs. (1814 kg)
- D** 3,000 lbs. (1361 kg)
- E** 2,000 lbs. (907 kg)
- F** 1,500 lbs. (680 kg)
- G** 1,000 lbs. (454 kg)
- H** 900 lbs. (408 kg)

DEALER IMPRINT

GEHL
gehl.com

West Bend, WI 53095 U.S.A.

Tel: 262-334-9461

Fax: 262-338-7517


For more information on Gehl
equipment, call our hotline at

1-800-628-0491

or visit gehl.com

Gehl reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.

Gehl reserves the right to add improvements or make changes in features and specifications at any time without notice or obligation.



GEHL COMPACT EQUIPMENT